



# **I-Duct Ventilator**

Refer to product table below for applicable product codes covered by this document

Issue

В

#### **Product Type & Application**

Bradford Ventilation I-Duct (Inlet Duct) is designed to allow outside air to be drawn into a sewer system or water treatment tank. The design of the I-Duct allows it to rotate to align with the wind direction for optimal air intake.

### Compliance with the NCC

There are no relevant clauses within the NCC for this product to comply with.

#### **Evidence of Suitability**

There are no relevant clauses within the NCC to show compliance with – refer to the Additional Data section of this PTS for other compliance data.

#### Conditions of Storage, Use & Maintenance

- Store in the original packaging in a cool and dry area.
- Top load only damage may be caused to ventilator by stacking other items on top of the packaging and/or ventilator.
- This product requires regular inspection and maintenance, which should be increased in frequency when used in harsh environments.
- The bird mesh must be cleaned regularly to maintain product flowrate.
- Do not attempt to repair contact Bradford Ventilation for service advice.

Refer to the product warranty at bradfordventilation.com.au for more information.

#### **Limitations of Use**

- **IMPORTANT** Do Not Modify This Product: Performance and safety are only achieved by the product or configuration listed in this PTS.
- Do not use for exhausting hazardous, abrasive, acidic and alkaline vapour or areas containing explosive or corrosive materials
- This product has not been tested for use in cyclonic wind regions C or D.
- This product is not suitable for use in Bush Fire BAL-12.5 to BAL-40 or BAL-FZ rated areas.
- Products installed within 1,000m of breaking surf are recommended to be specified with (optional) polyolefin or powder coat finish for additional corrosion protection.
- Seek technical advice from Bradford Ventilation on application suitability if unsure.

#### **Specific Design or Installation Instructions**

- Caution: The head of this product can rotate without warning (even during installation) – always keep body parts away from moving components.
- The rotating head of this product must be installed upright to ensure correct operation.
- The bird mesh should be periodically inspected. Remove foreign objects to maintain airflow.
- This product may be used in moist or dusty applications in conjunction with a regular inspection and maintenance program.
- May be used in conjunction with exhaust vents such as Bradford Ventilation E-Duct (Exhaust Duct) or Hurricane<sup>®</sup> S2 ventilators to form a complete ventilation solution.
- This product is suitable for installation onto suitable sized piping or tubing where a suitable seal can be achieved.

For general installation guidance refer to the product installation guide at www.bradfordventilation.com.au






# **I-Duct Ventilator**

# **Applicable Product Codes (SKU)**

Size	150mm	225mm	300mm
Code	61413	61414	61415

#### **Product Dimension**

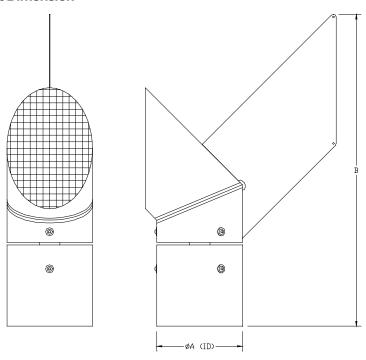

Model	150mm	225mm	300mm
A (length in mm)	156	235	308
B (length in mm)	580	725	850
Weight (in kg)	1.9	2.8	3.7

# **Product Specification**

Component	Material	
Turbine	Aluminium	
Bearing Housing	Stainless Steel	
Screws, Washers & Rivets	Stainless Steel	
Bird Mesh	Galvanised Steel	
Finish	Powder coated – inside & outside.	

CSR Bradford Locked Bag 1345 North Ryde BC NSW 1670 csrbradford.com.au

For further technical advice call 1300 850 305 or visit csrbradford.com.au

